
When gluing seams together, gap between seams should not exceed a 1/4" gap. STANDARD MANUFACTURED BEAD SPACING ARE EITHER 1/4" TO 1/2". When preparing the seam try to cut one of the grass panel being seamed as close to bead as possible (see panel A) without touching or cutting the bead. On other piece of grass panel being seamed, cut leaving majority of backing (see panel B) opposite of other grass panel being seamed.





Glue being added to seaming tape. Note temporary spikes being used to hold grass in place while lining up seams.



ARTIFICIAL TURF INSTALLATION


Rymar Synthetic turf Recommended infill: 1lbs to 1.5lbs per sqft 8" - 10" galvanized / steel spike along perimeter.

LAYER 2 OF COMPACTED AGGREGATE BASE 1" OF LIMESTONE SCREENINGS OR CHIPS AND DUST

LAYER 1 OF COMPACTED
AGGREGATE BASE
2"- 4" OF 3/4"
GRANULAR "A" BASE
MATERIAL or
3/4" CRUSHER RUN
(MIN 97% COMPACTION)

5oz Duracloth Multi-use or 3oz Duracloth

NATURAL DIRT SUB-GRADE (COMPACTED)

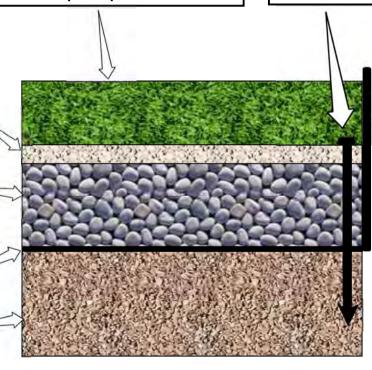

Garden edging (when applicable) can be plastic, stone or wood.

DETAIL NOTES:
Detail to be used as a guide and may alter due to project requirements

DRAWING AND DETAILS ARE THE PROPERTY OF RYMAR SYNTHETIC GRASS INC. AND ARE NOT TO BE COPIED, ALTERED, OR USED WITHOUT THE EXPRESSED WRITTEN CONSENT OF RYMAR SYNTHETIC GRASS INC.

SCALE: NOT TO SCALE

DETAIL: RYMARO2 BASIC TURF INSTALLATION



ARTIFICIAL TURF INSTALLATION TYPICAL NAILER AND BASE DETAIL

RYMAR TESTED TURF FOR PLAYGROUNDS

- TURF SECURED TO NAILER WITH GLUE AND/OR NAILS

- TURF TO BE NO MORE THEN 1/2" BELOW SOLID PERIMETER BEING WOOD, CONCRETE, ASPHALT OR PAVER STONE

2"x 4" PT WOODEN NAILER
OR 1" X 4" COMPOSITE NAILER
- NAILER TO BE SECURE
TO WOOD, CONCRETE OR
ASPHALT WITH EITHER
NAILS, LAG BOLTS OR

SOLID PERIMETER
- THIS COULD BE
WOOD, CONCRETE,
ASPHALT OR PAVER
STONE

LAYER 1 FOAM PADDING

-1" OR 2" FOAM PAD

- 1 TO 2 PCS OF FOAM PADDING DEPENDING ON FALL HEIGHT IF REQUIRED

LAYER 2 OF COMPACTED AGGREGATE BASE

- 3" - 4" OF 3/4"

GRANULAR "A" OR CRUSHE:R
RUN

(100% COMPACTION)

NATURAL DIRT SUB-GRADE (COMPACTED)

SCREWS.

DETAIL NOTES:
Detail to be used as a guide and may alter due to project requirements

DRAWING AND DETAILS ARE THE PROPERTY OF RYMAR SYNTHETIC GRASS INC. AND ARE NOT TO BE COPIED, ALTERED, OR USED WITHOUT THE EXPRESSED WRITTEN CONSENT OF RYMAR SYNTHETIC GRASS INC.

SCALE: NOT TO SCALE

DETAIL: RYMARO2NAILER + FOAM PADD